

Features

- Workstation is to be used in electrical laboratory as students' or experimenter's workstation.
- Workstation is to be used to place the TPS (Training Panel System).
- The table legs can be adjusted for leveling.
- Equipped with key to turn the workstation on and off.
- Equipped with emergency button.
- Equipped with ELCB according to IEC 61008.
- Complete with protection over load.
- Knock-down system.

Specification

- Workstation dimension: length is 1236 mm, width is 800 mm, and height is 750 mm.
- Material: the table top is 18 mm multiplex, HPL-melamine coated.
- Frame: metal profile (20 x 40 mm), 1 mm thick, and powder coating finishing.
- Dimension of Workstation's panel: length is 1236 mm, width is 321 mm, and height is 200 mm.
- The workstation panel is equipped with:
 1. One (1) phase socket.
 - One phase source socket with 1P + N + PE (3 wire) terminal.
 - Maximum current: 16 A/400 VAC.
 2. One phase ELCB .
 - 2 contact terminals, 1P + N (2 wire).
 - Maximum current: 25 A/400 VAC, with leakage current protector of 30 mA, in accordance with IEC 61008.
 3. One Phase MCB.
 - 1 contact terminal (1 wire).
 - Current interruption maximum is 10 A/250 VAC.
 4. The output terminal consist of:
 - 1 one phase output terminal of 1P + N + PE (3 wire), closed type (safety type).
 - 3 outlets with terminal of P + N + PE (3 wire), maximum current is 16 A/250 V.
 5. Meter Panel Analog
 - Voltmeter
Measuring range: 0 - 500 VAC, the moving coil instrument 1.5 class.
 - Amperemeter
Measuring range: 0 - 20 VAC the moving coil instrument 1.5 class.
 6. The indicator light consist of :
 - 1 red light to indicate the input voltage.
Maximum working voltage is 240 VAC, lamp diameter is 16 mm.
 - 1 green light to indicate that the Workstation is on.
Maximum working voltage is 240 VAC, lamp diameter is 16 mm.
 7. Emergency button.
 - 2 contact units, 1 NC dan 1 NO.
 - Maximum voltage is 600 VAC.
 - The contact's maximum current is 1.2 A, diameter is 22 mm.

Workstation Desk, 1 Phase

GLF 158 05



Excessive current and leakage current protector.



Output socket and terminal, equipped with indicator button.


Continue >>

Training Panel System

>> *Specification Continued*

9. Safety key.
- For turning on/turning off the power source of the Workstation.
 - Diameter is 22 mm.

- The one phase socket source uses IP 44.
- Equipped with operation manual

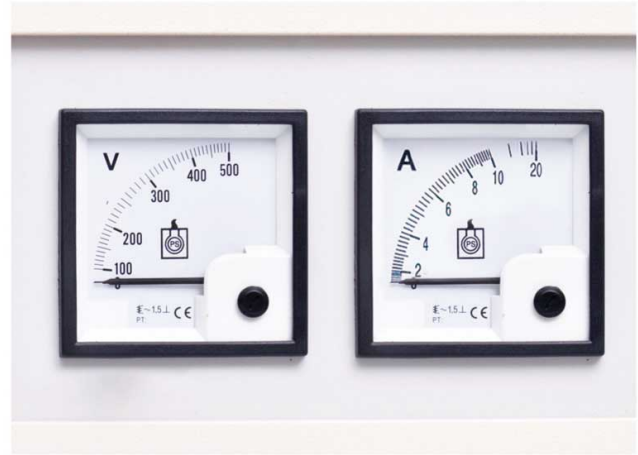

Meter panels Analog



International outlets



International outlet, emergency button, and protector key, equipped with indicator light.



Workstation deks is to be used to place the TPS (Training Panel System).

Specifications and illustrations are subject to change without prior notice